


JD4-80.0KW

Standard Features

- Single bearing brushless generator
- +/- 1% Solid-state voltage regulation
- Low 1,800 RPM operating speed
- Automatic engine shutdown for low oil and high coolant temperature
- Freshwater heat exchange cooling
- Zinc anode in heat exchanger
- Water-cooled manifold and Stainless Steel exhaust elbow
- Direct drive seawater pump
- Primary fuel filter
- Secondard fuel filter
- Air intake Cleaner / Silencer
- 12 Volt DC start / Battery charging alternator
- 4-Point isolation motor
- Awl-Craft 2000 urethane finish
- 5-Year Limited Warranty

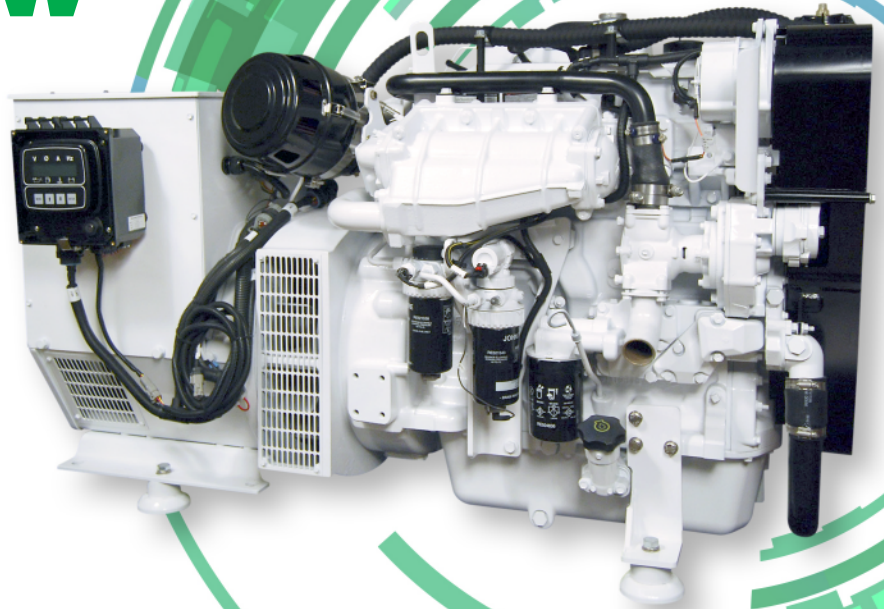

Specifications

Model	JD-80.0KW
Engine	John Deere 4045AFM85
Cu. In. Displacement	273
Bore x Stroke	4.21 x 5.00 (in.)
Dims (LxWxH)	65 x 32 x 38 (in.)
Enclosure Dims (LxWxH)	68 x 38 x 41 (in.)
Weight (lbs.)	2459
Output (volts)	208 Three phase
Output (amps)	223
Output (watts)	80,000
Fuel Consum. @ 50% load	4.3 GPH
Fuel Consum. @ 100% load	7.6 GPH
Exhaust Dia.	4.0 in.

Specifications are subject to change without notice

Optional Equipment

- J-can electronic control panel with display for all engine and generator functions
- Single phase output - 120/240
- 24 Volt DC Start / Battery charging alternator
- Dedicated motor starting generator windings
- Stainless Steel drip pan
- Powder coated aluminum enclosure
- Remote oil filter kit
- 50 cycle output
- Custom chrome packages
- Bow thruster FPTO
- Spare parts kit



2880 Hammondville Road • Pompano Beach, FL 33069
Ph: 954-979-5899 • Fax: 954-979-4349
info@phasormarine.com • www.phasormarine.com

rev020316