


# K2-4.5PMG

## Standard Features

- Kubota Diesel Engine
- Single bearing direct coupled generator
- Low 1,800 RPM operating speed
- Safety shutdown system for high coolant temperature or low lube oil pressure
- Single series circuit control system with no printed circuit boards - tinned wiring
- Freshwater double pass heat exchanger
- Water-cooled exhaust manifold with removable intergral Cupro-Nickel heat exchanger core
- Zinc anode in heat exchanger
- Stainless Steel exhaust elbow cast
- Gear-driven raw water pump
- 4-Point isolation mounts S/S
- Molded blue silicone water hoses with Stainless Steel AWAB clamps
- Air intake Cleaner / Silencer
- Main Line Circuit breaker
- Spin-on lube and fuel filters
- Belt guard
- 5-Year Limited Warranty

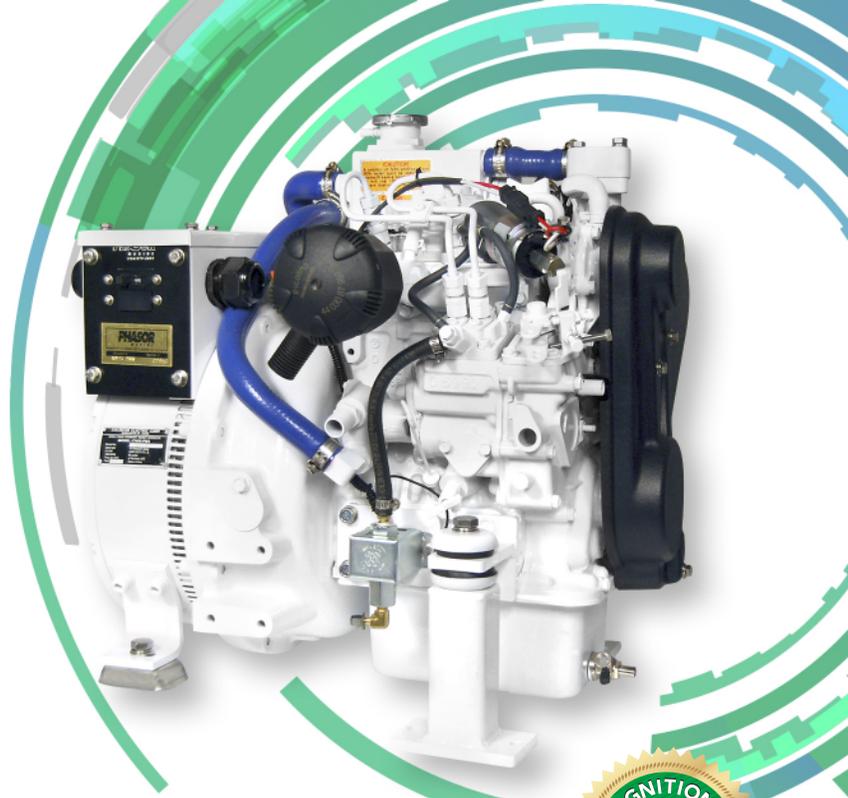

## Specifications

Kubota Model	Z602-E4B
Cylinders	2
Cu. In. Displacement	36.55
Bore x Stroke	2.83 x 2.90 (in.)
Dims (LxWxH)	20 x 17 x 22 (in.)
Enclosure Dims (LxWxH)	26 x 20 x 24.2 (in.)
Weight (lbs.)	294
Output (volts)	120/240
Output (amps)	38/19
Output (watts)	4,500
Exhaust Dia.	2 in.
Raw water Dia.	3/4 in.
Fuel Line Dia.	5/16 in.
Return Line Dia.	3/16 in.

*Specifications are subject to change without notice*

## Optional Equipment

- Custom remote engine / generator instrument panels
- Stainless Steel drip pan
- 24 Volt starting system
- Sound insulation blanket
- Powder coated aluminum enclosure
- Remote oil filter kits
- Custom chrome packages
- Spare parts kit



2880 Hammondville Road • Pompano Beach, FL 33069  
Ph: 954-979-5899 • Fax: 954-979-4349  
info@phasormarine.com • www.phasormarine.com

rev020316