


# K3-11.0KW

## Standard Features

- Kubota Diesel Engine
- Single bearing direct coupled generator
- Low 1,800 RPM operating speed
- Safety shutdown system for high coolant temperature or low lube oil pressure
- Freshwater double pass heat exchanger
- Water-cooled exhaust manifold with removable intergral Cupro-Nickel heat exchanger core
- Zinc anode in heat exchanger
- Cast Stainless Steel exhaust elbow
- Gear-driven raw water pump
- 4-Point isolation mounts Stainless Steel
- Molded blue silicone water hoses with Stainless Steel AWAB clamps
- Air intake Cleaner / Silencer
- Closed crankcase breather system
- Spin-on lube and fuel filters
- Secondary 5 Micron fuel filter
- Self-bleed fuel system
- USCG approved fuel lines
- Electric fuel transfer pump
- Awl-Craft 2000 urethane finish
- Belt guard
- Circuit breaker
- Start / Stop / Preheat / Hourmeter
- 5-Year Limited Warranty

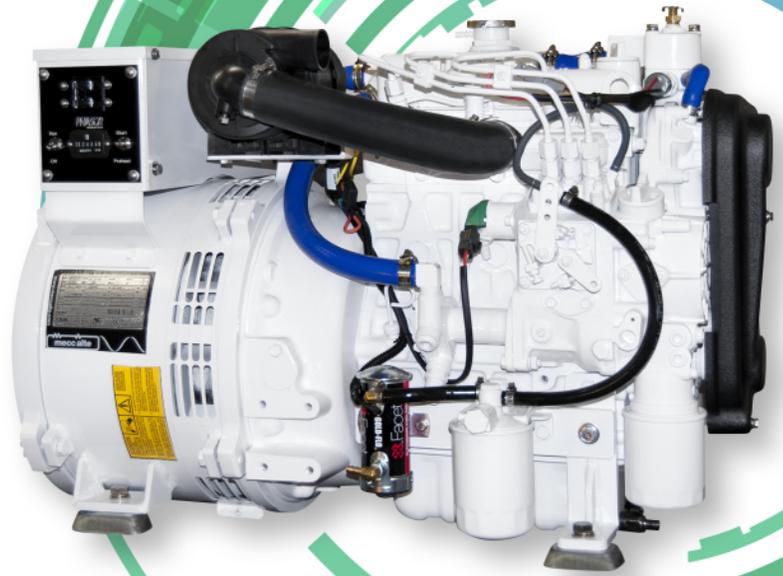

## Specifications

Kubota Model	D1305-E3BG
Cylinders	3
Cu. In. Displacement	76.96
Bore x Stroke	3.07 x 3.46 (in.)
Dims (LxWxH)	33 x 18 x 22.5 (in.)
Enclosure Dims (LxWxH)	38 x 23 x 25.5 (in.)
Weight (lbs.)	538
Output (volts)	120/240
Output (amps)	92.5/45.8
Output (watts)	11,000
Exhaust Dia.	2 in.
Raw water Dia.	3/4 in.
Fuel Line Dia.	5/16 in.
Return Line Dia.	3/16 in.

*Specifications are subject to change without notice*

## Optional Equipment

- Remote Start / Stop - 20 ft. harness
- DC Gauge panel - Start / Stop / Preheat / Hourmeter
- Stainless Steel drip pan
- 50 cycle output
- Sound insulation blanket
- Powder coated aluminum enclosure
- Spare parts kit



2880 Hammondville Road • Pompano Beach, FL 33069

Ph: 954-979-5899 • Fax: 954-979-4349

info@phasormarine.com • www.phasormarine.com

rev012821