


8.00 (REBATE FOR FLUSH MOUNT)

REFERENCE PANEL




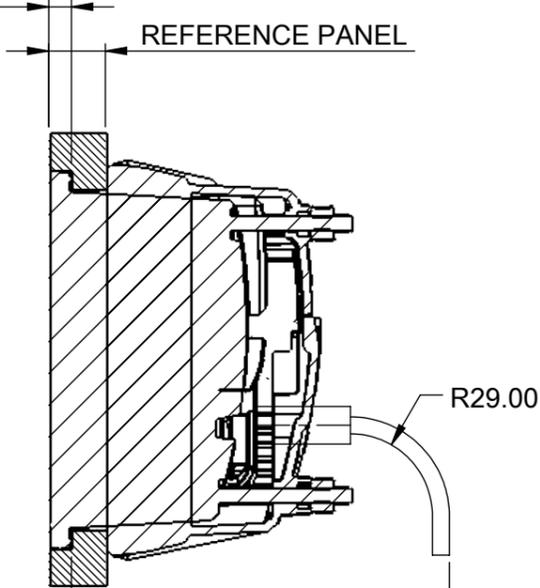


FOR STRAIGHT CABLE THE MINIMUM CLEARANCE = 210.00

FOR 90° CABLE THE MINIMUM CLEARANCE = 190.0

(CABLE SKETCH NOT TO SCALE)

SECTION X-X

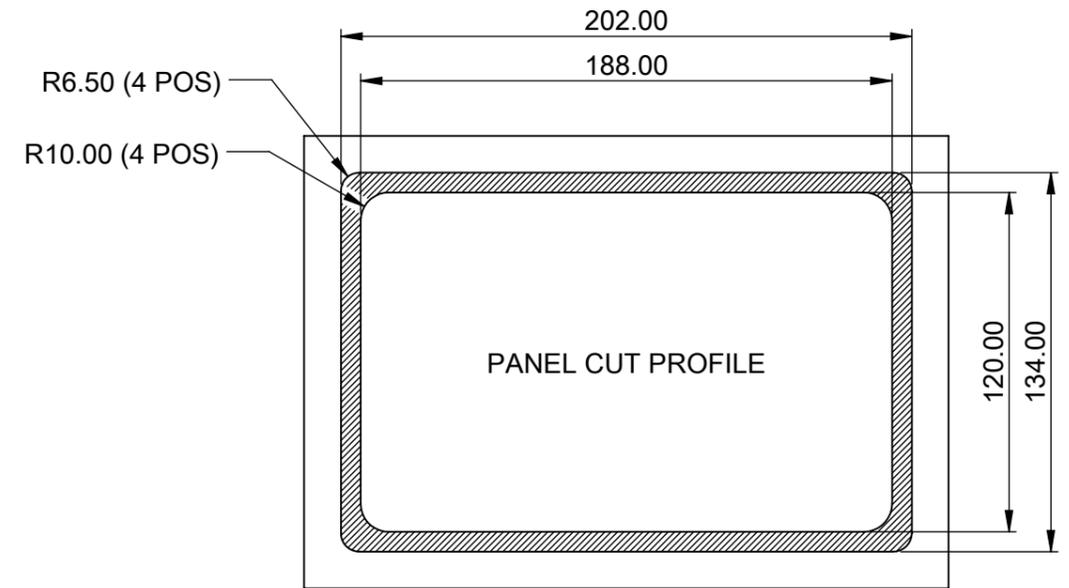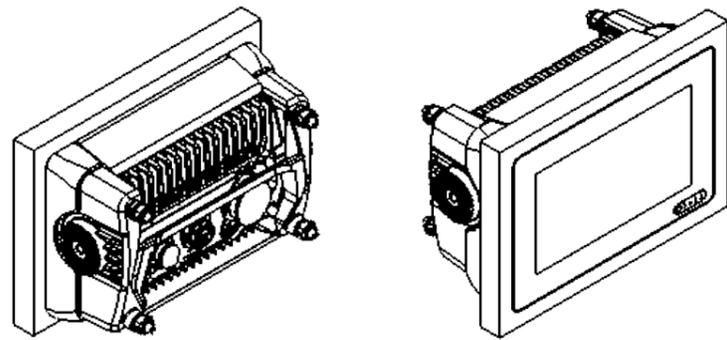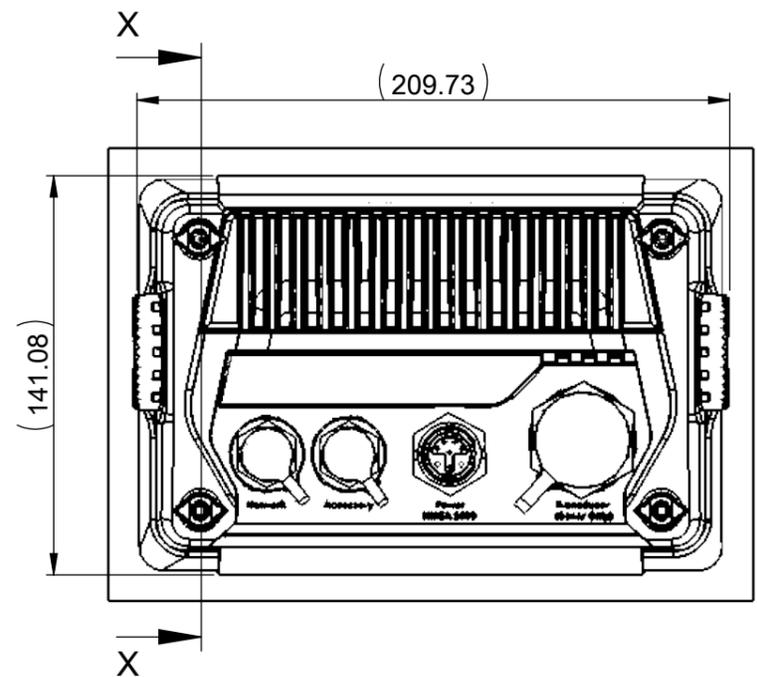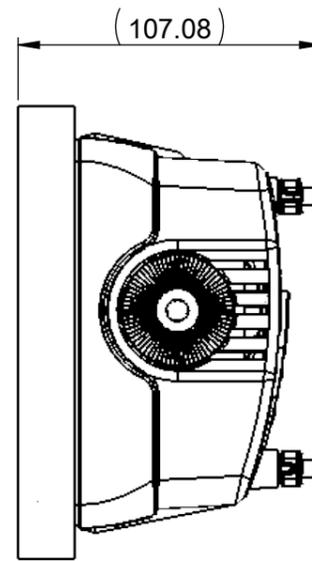

NOTES:

1) FOR INFORMATION ON INSTALLATION, CONNECTIONS AND PRODUCT SPECIFICATIONS, PLEASE REFER TO HANDBOOK, PRODUCT SUPPORT AND WORKSHOP MANUALS.


2) FOR ANY DIMENSIONAL INFORMATION NOT INCLUDED PLEASE CONTACT YOUR SALES REPRESENTATIVE.

3) DIMENSIONS SHOWN ARE ACTUAL PRODUCT SIZE AND DO NOT INCLUDE ANY CLEARANCE DATA.

Raymarine
A FLIR COMPANY

THE INFORMATION CONTAINED HEREIN SHALL NOT BE REPRODUCED WITHOUT THE PRIOR WRITTEN PERMISSION OF RAYMARINE LTD

© 2011 RAYMARINE LTD



DRAWN TO BS308



DO NOT SCALE - IF IN DOUBT ASK

| | | |
|------------------|----------|------------------|
| DRN: | R.M(PDT) | DATE: 08/11/2016 |
| DIMENSIONS IN MM | | SCALE: 1:3 |

TITLE AXIOM 7in MFD FLUSH MOUNT

DRAWING No. D_AXIOM7_FM