

Drive 4G-X RV

SKU: 470410

MAP: \$499.99

FEATURES

- Boosts 4G LTE & 3G for RVs
- For multiple devices and users
- Works on ALL phones with ALL carriers
- Works both when parked AND in-motion
- Enhances talk, text, and high-speed 4G LTE internet

⚠️ WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



LTE FASTEST NETWORK SPEEDS

4G FAST NETWORK SPEEDS

+ UP TO +50 dB GAIN

+ MULTI-USER WIRELESS BOOSTER

Kit Includes



Drive 4G-X



4G Omni Antenna (304421)



4G Desktop Antenna (311160)



AC/DC Wall Power Supply (850011)



20' Black RG-6 Cable (950621)

15 Sets of Coax Cable Tie-Downs (901157)

Hardwire DC/DC Power Supply (851111)

Coax Cable Through-Body Cover

About

The **Drive 4G-X RV** is our powerful in-vehicle cell phone signal booster kit certified for use anywhere in the US. The Drive 4G-X RV boosts voice and data with max FCC-allowed 50 dB system gain, enhancing 4G LTE, as well as 3G network signals, up to 32x. RVers get fewer lost connections and dead zones, better call quality as well as faster data uploads and downloads whether parked or in-motion in their RV. Works in all classes of RV; Class A, Class C and all towables.


As with all weBoost boosters, all components needed come in one package for easy DIY installation. This includes inside and outside antennas, coax cables with connectors pre-installed and both a 110V AC wall plug and a 12V fused DC hardwire power supply. The Drive 4G-X RV works with all cellular devices, on all U.S. carriers, simultaneously.

All weBoost boosters come with a 2-year warranty.

Specifications

MODEL NUMBER	470410 ⁺	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 2	1900 MHz
MAX GAIN	50 dB	
IMPEDANCE	50 Ohm	
POWER	6V / 2.5A	
CONNECTORS	SMA Female	
BOOSTER DIMENSIONS	6.25 x 4.5 x 1 in	
BOOSTER WEIGHT	.77 lbs	


Installation

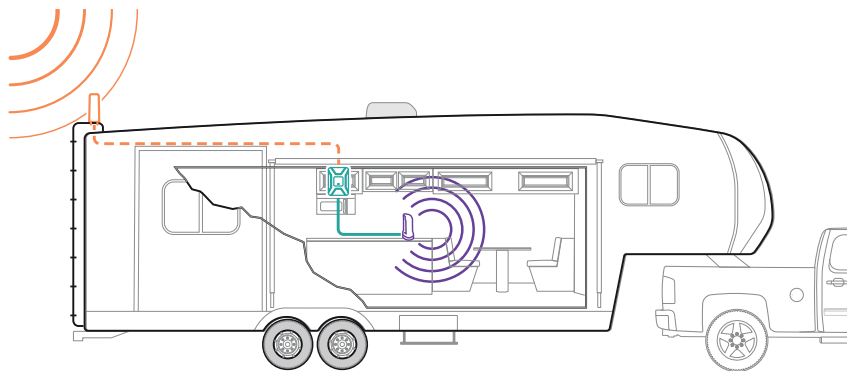


- 1 Receives signal:** The powerful antenna reaches out to access a voice and 3G, 4G, and LTE data signal, and delivers it to the booster.
- 2 Boost signal:** The booster receives the signal, amplifies it, and serves as a relay between your phone and the nearest cell tower.
- 3 Broadcasts signal:** Your devices get a stronger signal, and calls and data are fed through the booster back to the network.

Package Dimensions


10.25 L x 7.25 W x 11.5 H



FRONT



SIDE



TOP/BOTTOM



WEIGHT

MASTER CARTON: 28 L x 19 W x 11 H | 33 lbs. | QTY 5

Support



2 Year Warranty from Purchase.

Website: <http://support.weboost.com>

Phone: +1 866 294 1660
Monday to Saturday

FOR PARTNER'S USE

UPC

